


- NOTES:**
1. CABLE MUST PASS CONTINUITY TEST.
 2. INSULATION RESISTANCE: 20M ohms.
 3. HI-VOLTAGE: 300VDC/0.1SEC.
 4. Specify Length as Suffix on Part Number in mm.
For Example:
SATA-10077-300 = 300mm Long SATA Cable.
 5. RoHS COMPLIANT.

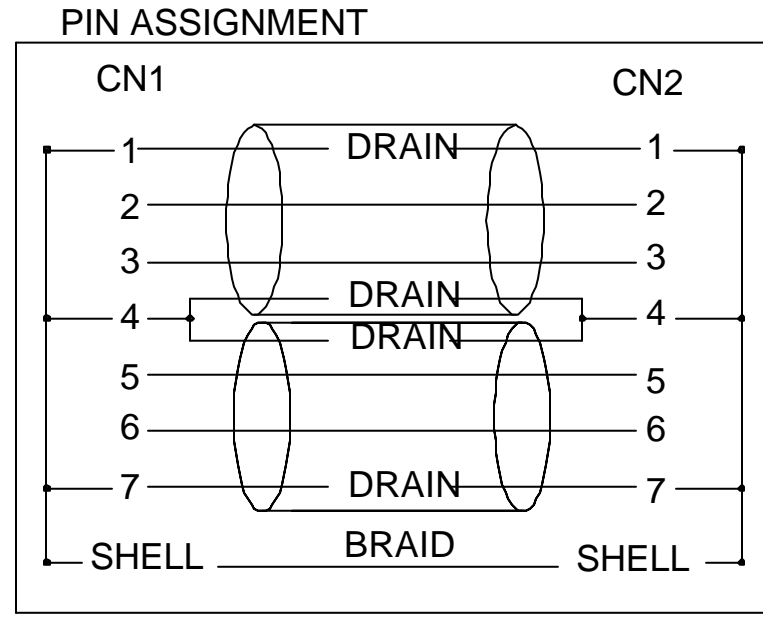

PVC1	15g	PVC 45P COLOR:BLACK(FH-BK01)
CN1 CN2	2PCS	SERIAL ATA 7P PIN G/F #BLACK SHELL NICKEL PLATED
CABLE1	1PCS	UL20513 {(26AWG*2C+A+2E)+COVERING+A+B} *2FØ4.0*10.2mm±0.2 JACKET COLOR:BLACK.
Location	Q'ty	Description

TOLERANCE		 <small>1015 GRANT STREET S.E. ATLANTA, GA 30315</small>	TITLE: SATA 7P TO SATA 7P				
LINEAR	ANGLES		PART NO. SATA-10077-X				
X.±	X'.±		DWG NO. SC-10077				
.X±0.25	.X'±	APPD:	MAT'L:	UNITS	SCALE	SHEET	REV
.XX±0.15	.XX'±	CHKD:	FINISH:		MM	NONE	1 OF 1
.XXX±0.05	.XXX'±	DRWN: AXL	Q'TY:				

[A]	ISSUED	AXL	1/3/07'
REV	ECN NO.	NAME	DATE